AIKO

NEOSTAR

3S54 Mono-Glass Module

465W-495W

Technical Features:

- Partial Shading Optimisation
- Better Temperature Coefficient
- High Temperature Restriction
- Micro-crack Resistance
- Higher Power
- Lower BOS
- More Aesthetic Values
- Infinite Technology

TIER 1 BloombergNEF

ESG AWARD 2023/24

inter solar award 2023 WINNER

reddot winner 2023

25 year Product Warranty

30 year Performance Warranty

CE

TÜVRheinland

Warranty partner

Munich RE


Made in China


Neostar 3S54


AIKO-Axxx-MCE54Mb

495W	24.8%	1%	0.35%
Output	Efficiency	First-year Degradation	Annual Degradation from Year 2-30

30-year Linear Performance Warranty

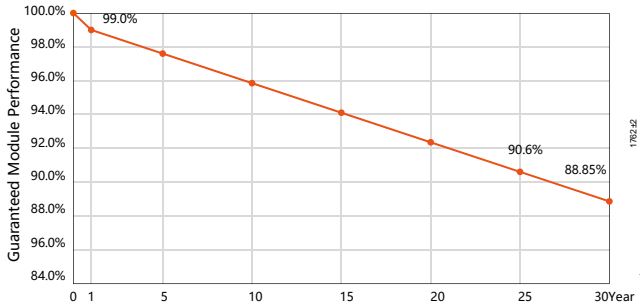





Tolerance
L: ±2mm
W: ±2mm
Unit: mm

Electrical Characteristics (STC: AM1.5 1000W/m² 25℃ NOCT: AM1.5 800W/m² 20℃ 1m/s) Power Binning Tolerance:0~ + 3%

Module Type	AIKO-A465-MCE54Mb		AIKO-A470-MCE54Mb		AIKO-A475-MCE54Mb		AIKO-A480-MCE54Mb		AIKO-A485-MCE54Mb		AIKO-A490-MCE54Mb		AIKO-A495-MCE54Mb	
Test Conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
P_{max} [W]	465	352	470	356	475	360	480	364	485	367	490	371	495	375
V_{oc} [V]	40.60	38.52	40.70	38.61	40.80	38.71	40.90	38.80	41.00	38.90	41.10	38.99	41.20	39.09
V_{mp} [V]	34.20	32.45	34.30	32.54	34.40	32.64	34.50	32.73	34.60	32.83	34.70	32.92	34.80	33.02
I_{sc} [A]	14.69	11.87	14.72	11.89	14.76	11.93	14.80	11.96	14.84	11.99	14.88	12.02	14.92	12.06
I_{mp} [A]	13.60	10.87	13.71	10.96	13.81	11.04	13.92	11.13	14.02	11.21	14.13	11.29	14.23	11.37
Module Efficiency	23.3%		23.5%		23.8%		24.0%		24.3%		24.5%		**24.8%**	

Product Specification

Cell Type	N-Type BC
Glass	3.2mm tempered glass
Backsheet	High weather resistant backsheet
Frame	Black anodized aluminum
Cable	4mm²(IEC) 12AWG(UL) ±1200mm
No. of Cells	108(6*18)
Junction Box	IP68, 3 bypass diodes
Connector	PV-KST4-EVO 2A/6I/ PV-KBT4-EVO 2A/6I from Staubli Electrical Connectors AG
Weight	20.6kg±3%
Dimension	1762*1134*30mm
Package Detail	37pcs per pallet / 222pcs per 20'GP / 962pcs per 40'HC

Temperature Ratings (STC)

Temperature Coefficient of I_{sc}	+ 0.05%/ ℃
Temperature Coefficient of V_{oc}	- 0.22%/ ℃
Temperature Coefficient of P_{max}	- 0.26%/ ℃

Installation Guide

T_{98} max	70℃
Module Operation Temperature	-40℃ - +85℃
Maximum Series Fuse Rating	25A
Protection Class	ClassⅡ
P_{MAX} and V_{OC} and I_{SC} Tolerance	±3%
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	40 mm diameter hail at 27.5 m/s
Fire Rating	IEC Class C

Zhejiang Aiko Solar Technology Co., Ltd.
www.aikosolar.com
marketing@aikosolar.com

*AIKO reserves right to update the specification without notice
V2.1_202502_DsDr_EN
* AU Market Only