Hi-MO X10 Explorer

LR7-72HVH

635~650M

- Suitable for Distribution Market
- Peak efficiency with top power generation performance
- TaiRay wafer & BC technology enhances high product reliability
- Smart manufacturing & LONGi product lifecycle standards deliver exceptional product quality

15 15-year Warranty for Materials and Processing

30 30-year Warranty for Extra Linear Power Output



Complete System and Product Certifications

IEC 61215, IEC 61730

ISO9001:2015: ISO Quality Management System

ISO14001: 2015: ISO Environment Management System

ISO45001: 2018: Occupational Health and Safety

IEC62941: Guideline for module design qualification and type approval

LONGi


Hi-MO X10 Explorer

LR7-72HVH 635~650M


24.1%	0~3%	<1%	0.35%	BC-CELL
MAX MODULE EFFICIENCY	POWER BINNING TOLERANCE	FIRST YEAR POWER DEGRADATION	YEAR 2-30 POWER DEGRADATION	LOWER OPERATING TEMPERATURE

Additional Value

30-Year Power Warranty

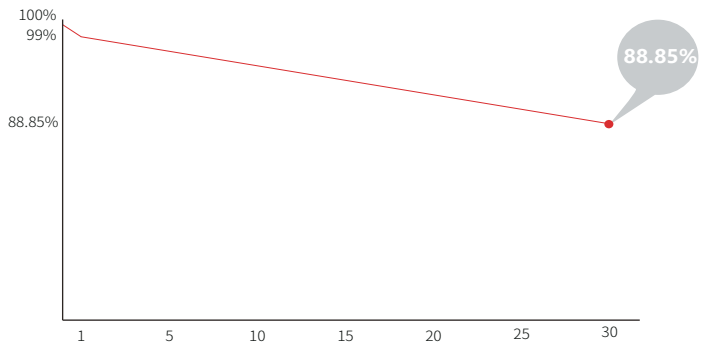



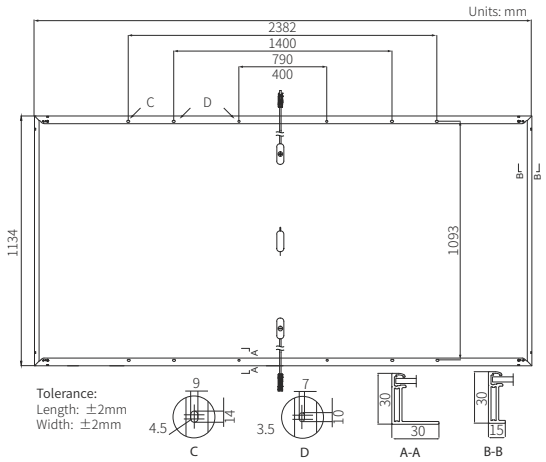

Mechanical Parameters

Cell Orientation	144 (6×24)
Junction Box	IP68, three diodes
Output Cable	4mm², +400, -200mm/±1400mm length can be customized
Glass	Single glass, 3.2mm coated tempered glass
Frame	Anodized aluminum alloy frame
Weight	28.5kg
Dimension	2382×1134×30mm
Packaging	36pcs per pallet / 144pcs per 20' GP / 720pcs per 40' HC
Connector	EVO2A(Staubli) or PV-LR5(LONGi)

Electrical Characteristics

STC : AM1.5 1000W/m² 25°C NOCT : AM1.5 800W/m² 20°C 1m/s Test uncertainty for Pmax: ±3%

Module Type	LR7-72HVH-635M		LR7-72HVH-640M		LR7-72HVH-645M		LR7-72HVH -650M	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	635	483	640	487	645	491	650	495
Open Circuit Voltage (Voc/V)	53.60	50.94	53.70	51.04	53.80	51.13	53.90	51.23
Short Circuit Current (Isc/A)	15.05	12.09	15.13	12.15	15.21	12.22	15.29	12.28
Voltage at Maximum Power (Vmp/V)	44.26	42.06	44.36	42.15	44.46	42.25	44.56	42.35
Current at Maximum Power (Imp/A)	14.35	11.50	14.43	11.56	14.51	11.63	14.59	11.69
Module Efficiency(%)	23.5		23.7		23.9		24.1	

Operating Parameters

Operational Temperature	-40°C ~ + 70°C
Power Binning Tolerance	0 ~ 3%
Power Measurement Tolerance	±3%
V_{oc} & I_{sc} Measurement Tolerance	±5%
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	25A
Nominal Operating Cell Temperature	45±2°C
Protection Class	Class II
Fire Rating	IEC Class C

Mechanical Loading

Front Side Maximum Static Test Loading	5400Pa
Rear Side Maximum Static Test Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

Temperature Ratings (STC)

Temperature Coefficient of Isc	+0.050%/°C
Temperature Coefficient of Voc	-0.200%/°C
Temperature Coefficient of Pmax	-0.260%/°C

Importer: LONGi Solar Australia Pty Ltd
Add: Level 17, 570 George Street, Sydney NSW 2000
Tel: 1800 328 888
Email: au@longi.com
ABN: 15 632 322 288
Website: www.longi.com/au

Manufacturer: LONGi Green Energy Technology Co.,Ltd.
Add: No.388,Middle Hangtian Road, Chang'an District, Xi'an, Shaanxi 710100,P.R.China.
Website: www.longi.com
Tel: (+86)400-860-1012
Email: market@longi.com

Specifications included in this datasheet are subject to change without notice. LONGi reserves the right of final interpretation.
(Australia and New Zealand Only)
Made in China